

T3SA3100 / T3SA3200 Fact Sheet

2.1 GHz and 3.2 GHz Spectrum Analyzers

Broad Measurement Range Frequency Range Up to 3.2 GHz



Key Specifications

Model	T3SA3200	T3SA3100
Frequency Range	9 kHz ~ 3.2 GHz	9 kHz ~ 2.1 GHz
Resolution Bandwidth	1 Hz ~ 1 MHz, in 1-3-10 sequence	1 Hz ~ 1 MHz, in 1-3-10 sequence
Displayed Average Noise Level	-161 dBm/Hz, Normalize to 1 Hz (typ.)	-161 dBm/Hz, Normalize to 1 Hz (typ.)
Phase Noise	< -98 dBc/Hz@1 GHz, 10 kHz offset	< -98 dBc/Hz@1 GHz, 10 kHz offset
Amplitude Precision	< 0.7 dB	< 0.7 dB

Tools for Improved Debugging

- ✔ Frequency Range from 9 kHz to 3.2 GHz.
 ✔ More application coverage from a single Spectrum Analyzer.
- ✔ -161 dBm/Hz Displayed Average Noise Level (Typ.)
 ✔ View and measure very small signals.
- ✔ -98 dBc/ Hz @10 kHz Offset Phase Noise (1 GHz, Typ.)
 ✔ Improved specification gives more accurate measurement results.
- ✔ Optional Tracking Generator
 ✔ Make fast and simple transmission measurements Make EMI Receiver measurements to CISPR 16-1-1 Measure VSWR, Return Loss, Reflection Coefficient
- ✔ Optional EMI Pre-compliance Test Kit
- ✔ Optional Reflection Measurement Kit
- ✔ Built-in switchable pre-amplifier.
 ✔ Integrated pre-amplifier allows higher sensitivity measurements.
- ✔ 10.1 inch (25.65 cm) color WVGA 1024 x 600 display.
 ✔ Clear and flexible display aids ease of use.
- ✔ USB Device, USB Host and LAN support.
 ✔ Remote control your measurements.

For more information, please contact:

ADMESS

ADMESS Vertriebs GmbH
Ernst-Kiefer-Straße 9
67292 Kirchheimbolanden
Germany

Tel.: +49 (0) 6352 / 78 99 8 - 0
Telefax: +49 (0) 6352 / 78 99 8 - 20
E-Mail: info@admess.de
www.admess.de



T3SA3100 / T3SA3200 Fact Sheet


2.1 GHz and 3.2 GHz Spectrum Analyzers

Smart Capabilities as Standard


- High performance specification as standard (see T3SA3000 data sheet for detailed specifications).
- Built-in preamplifier as standard. Enhances your measurement capability and sensitivity when measuring small signals.
- “Preset” and “Auto Tune” for quick set up.
- All-Digital IF Technology.
- Large, bright 10.1 inch (25.65 cm) color WVGA 1024 x 600 display.
- Built-in front panel accessible help system.
- File management (support for U-disc and local storage).
- Lightweight, small footprint, easy to transport.

Options to expand your measurement capabilities


- Customize and expand your measurement capabilities further with options
 - › Optional Tracking Generator. Add tracking generator capabilities to your Spectrum Analyzer to make transmission measurements on back planes, cables, filters, amplifiers, etc.
 - › Optional EMI Pre-compliance test kit. Add EMI Receiver Measurements following CISPR 16-1-1.
 - › Optional Reflection Measurement Kit. Add VSWR, Return Loss and Reflection Coefficient measurements.
 - › Optional Advanced Measurement kit. Add channel power, adjacent channel power ratio, time domain power, occupied bandwidth, third order intercept, etc, to further enhance the measurement capability of your spectrum analyzer.
- More specification details in the T3SA3000 Data Sheet.

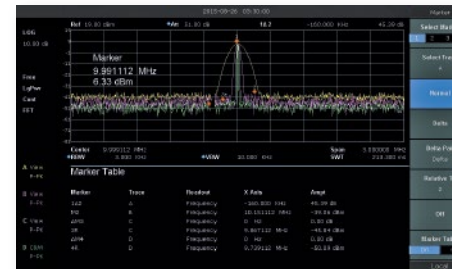


Supports four independent traces and cursors

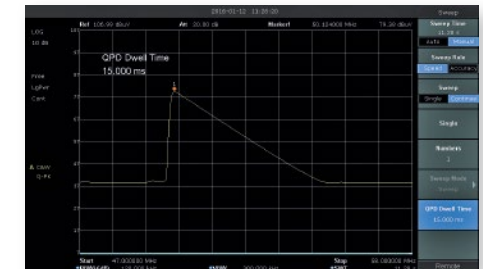


EMI filter and Quasi-Peak detector following CISPR 16-1-1 (T3SA3000-EMI)

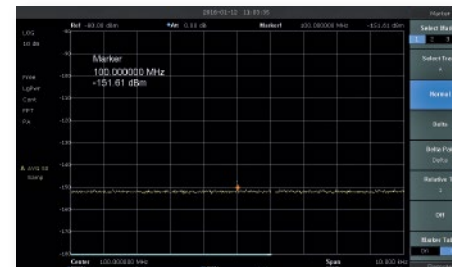

-151 dBm Displayed Average Noise Level (RBW = 10 Hz)

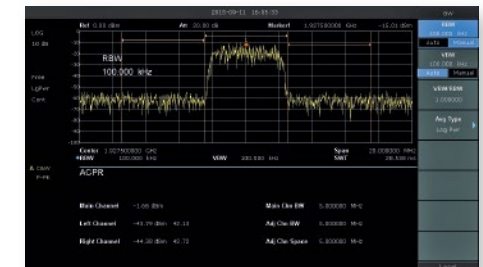

Advanced measurement kit (T3SA3000-ADM) includes onscreen ACPR measurements

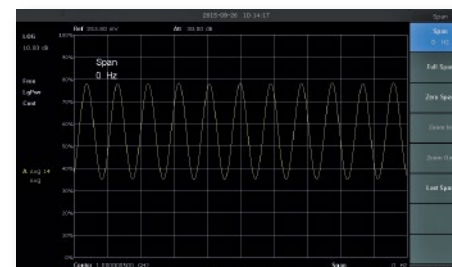

Zero span and demodulation capabilities